



SPOT

Proiettore orientabile a LED
Adjustable LED projector

Codice | Code

1036. ✕ ▲ ■ ●

Potenza | Power

40 W

32 W

28 W

20 W

14 W

✕

0

1

2

3

4

Finitura colore | Color finishing



white



black



aluminium

▲

1

2

9

Riferimento CCT | CCT reference

3000K

4000K

■

1

2

Ottica | Optic

15°

24°

40°

60°

●

1

2

4

5

Controllo | Control

DALI

Bluetooth

Materiale | Material

Alluminio verniciato

Painted aluminum

Temperatura di utilizzo | Operating temperature

-20°C to +40°C

Durata media stimata | Average estimated duration

L80/B10 50000 h (Tc 50° C)



Sicurezza | Safety

IP20 Classe II

Proiettore orientabile a LED. Corpo in alluminio pressofuso verniciato in bianco, nero e grigio. Orientabile da 0° a 90° sul piano verticale e di 358° su quello orizzontale. Montaggio a binario elettrificato a 220-240Vac 50-60Hz con alimentatore elettronico a scomparsa all'interno dell'adattatore. A richiesta, disponibile in versione dimmerabile con sistema Dali, Bluetooth. Possibilità di fissaggio con base a plafone. LED a tecnologia COB ad alta efficienza disponibile in temperature di colore 3000K/4000K, con CRI da maggiore 84 a 97. Ottica di precisione in policarbonato, con vetro trasparente di protezione. Durata nominale 50 000h, L80/B10. Classe d'isolamento II, grado di protezione IP20.

Adjustable LED projector. Die-cast aluminum body painted in white, black and grey. Adjustable from 0 to 90, on the vertical plane and 358 on the horizontal. Electrified rail mounting at 220-240vac 50-60hz with electronic driver in the adapter. dimmable version with Dali system, Bluetooth available upon request. Fixing possibility with ceiling base. High efficiency COB technology LED available in 3000K/4000K color temperatures, with CRI from higher 84 to 97. Precision polycarbonate optics, with transparent protective glass. Rated life 50 000h, L80/B10. Insulation class II, protection type IP20.

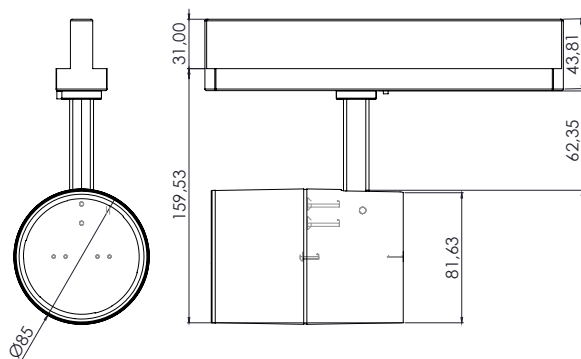


Disegno Tecnico
 Technical Drawing

Emissione del flusso luminoso
 Luminous flux emission


Codice base Base code	Potenza Power	Colore Color	CCT CCT	Ottica Optics	Lumen (lm)		Alimentazione Power supply	Peso Weight
					3000K	4000K		
1036.4 ▲ ■ ●	14 W	1 white 2 black 9 grey	1 3000K 2 4000K	1 15° 2 24° 4 40° 5 60°	1776	1823	230 V	1.2 kg
1036.3 ▲ ■ ●	20 W	1 white 2 black 9 grey	1 3000K 2 4000K	1 15° 2 24° 4 40° 5 60°	2450	2514	230 V	1.2 kg
1036.2 ▲ ■ ●	28 W	1 white 2 black 9 grey	1 3000K 2 4000K	1 15° 2 24° 4 40° 5 60°	3280	3367	230 V	1.2 kg
1036.1 ▲ ■ ●	32 W	1 white 2 black 9 grey	1 3000K 2 4000K	1 15° 2 24° 4 40° 5 60°	4229	4339	230 V	1.2 kg
1036.0 ▲ ■ ●	40 W	1 white 2 black 9 grey	1 3000K 2 4000K	1 15° 2 24° 4 40° 5 60°	5073	5205	230 V	1.2 kg

Curva fotometrica
 Photometric chart
