



DOWNLED ROUND MINI ORIENTABILE

Faro ad incasso LED orientabile
Adjustable LED downlight

Codice | Code

0325.✖▲■5

Potenza | Power

19 W

13,5 W

9,5 W

✖

0

1

2

Finitura colore | Color finishing

○ white

● black

● grey

▲

1

2

9

Riferimento CCT | CCT reference

3000K

4000K

■

1

2

Ottica | Optic

60°

Controllo | Control

DALI

PUSH

Bluetooth

Materiale | Material

Metallo verniciato - polycarbonato (PC)

Painted metal - polycarbonate (PC)

Temperatura di utilizzo | Operating temperature

-20°C to +50°C

Durata media stimata | Average estimated duration

L80/B10 50000 h (Tc 50° C)

Sicurezza | Safety

IP40 Classe I


Faro a incasso a LED, riflettore in polycarbonato cromo con sistema a anelli di rotazione. Dissipatore in estruso di alluminio. Foro da incasso min.14cm/ max.16,5 cm, con sistema di aggancio per installazione in controsoffitti. Montaggio a incasso a 220-240Vac 50-60Hz con alimentatore elettronico dedicato. A richiesta, è disponibile in versione dimmerabile. UGR <22 (valutazione abbagliamento EN12464-1). LED a tecnologia COB ad alta efficienza disponibile in temperature di colore 3000K/4000K, CRI > 84 a 97. Durata utile 50 000h, con mantenimento luminoso a L80 (temperatura media di esercizio 50°C). Classe d'isolamento II, grado di protezione IP40.

LED downlight, chrome polycarbonate reflector with rotating ring system. extruded aluminum dissipator. Recessed opening min 14cm/max.16.5 cm, suspended ceilings installation hooking system. Recessed mounting at 220-240vac 50-60hz with dedicated electronic ballast. dimmable version available upon request. UGR 22 (Glare rating EN12464-1). High efficiency COB technology LED, color temperatures available 3000K/4000K, CRI > 84 to 97. Useful life 50 000h, with light maintenance at L80 (average operating temperature of 50°C). Insulation class I, protection type IP40.





Disegno Tecnico
Technical Drawing

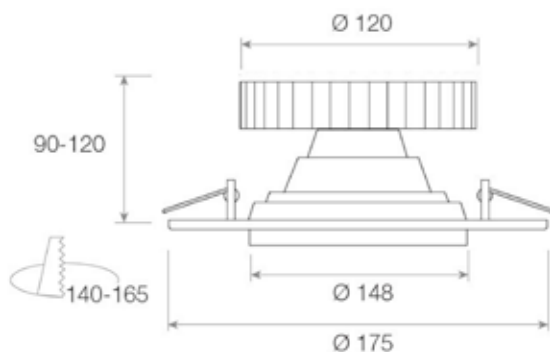


Emissione del flusso luminoso
Luminous flux emission



Codice base Base code	Potenza Power	Colore Color	CCT CCT	Ottica Optics	Lumen (lm)		Alimentazione Power supply	Peso Weight
					3000K	4000K		
0325.2 ▲ ■ 5	9,5 W	1 white 2 black 9 grey	1 3000K 2 4000K	60°	1357	1400	230 V	720 g
0325.1 ▲ ■ 5	13,5 W	1 white 2 black 9 grey	1 3000K 2 4000K	60°	1868	1926	230 V	720 g
0325.0 ▲ ■ 5	19 W	1 white 2 black 9 grey	1 3000K 2 4000K	60°	2603	2684	230 V	720 g

Curva fotometrica
Photometric chart



60°